

La gamme de microphones de plafond Analog-X est le plus récent ajout à notre gamme de microphones de plafond et la gamme de microphones de plafond tri-élément la plus avancée pour les applications de conférence et de renforcement sonore.

Flexible et facile à utiliser, ce système est 100% RF, optimisé pour l'intelligibilité de la parole, et peut être connecté en chaîne pour faciliter l'installation.

C'est un compagnon idéal de tous nos mélangeurs DSP, ainsi que de tous les mélangeurs DSP tiers.



*Les LED s'allument en exemple

- + Tableau de microphone de plafond à trois éléments
- + Couverture complète à 360 degrés
- + Qualité audio supérieure avec une large bande passante et un SNR élevé
- + Optimisé pour l'intelligibilité de la parole
- + Indicateurs LED pour On/Mute
- + Jusqu'à 4 rangées de micro (12 canaux) dans un système combiné
- + Des éléments de microphone numérotés pour une identification facile
- + 100% de blindage pour RF et autres interférences
- + Design élégant et discret
- + Facilement réglable pour la taille désirée (0 à 7 pieds)
- + Options de couleur blanche ou noire
- + Fonctionne avec ClearOne et d'autres mélangeurs DSP tiers



APPLICATIONS

Salle de conseils

Salle de conférence

Huddle rooms





Salle d'entraînement

Salle de réunion


Salle d'audience

Installations de télé-médecine

Ceiling Microphone Array Analog-X

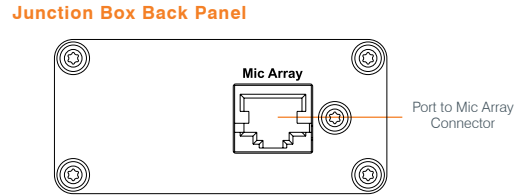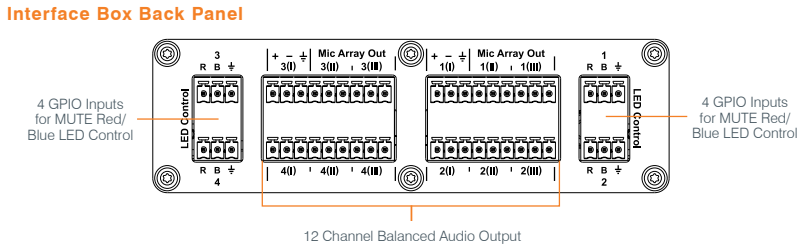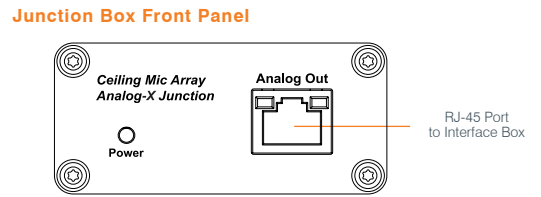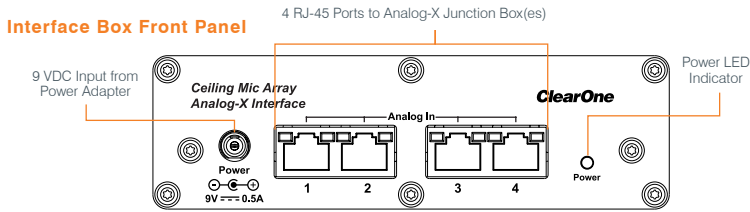


4 Array System

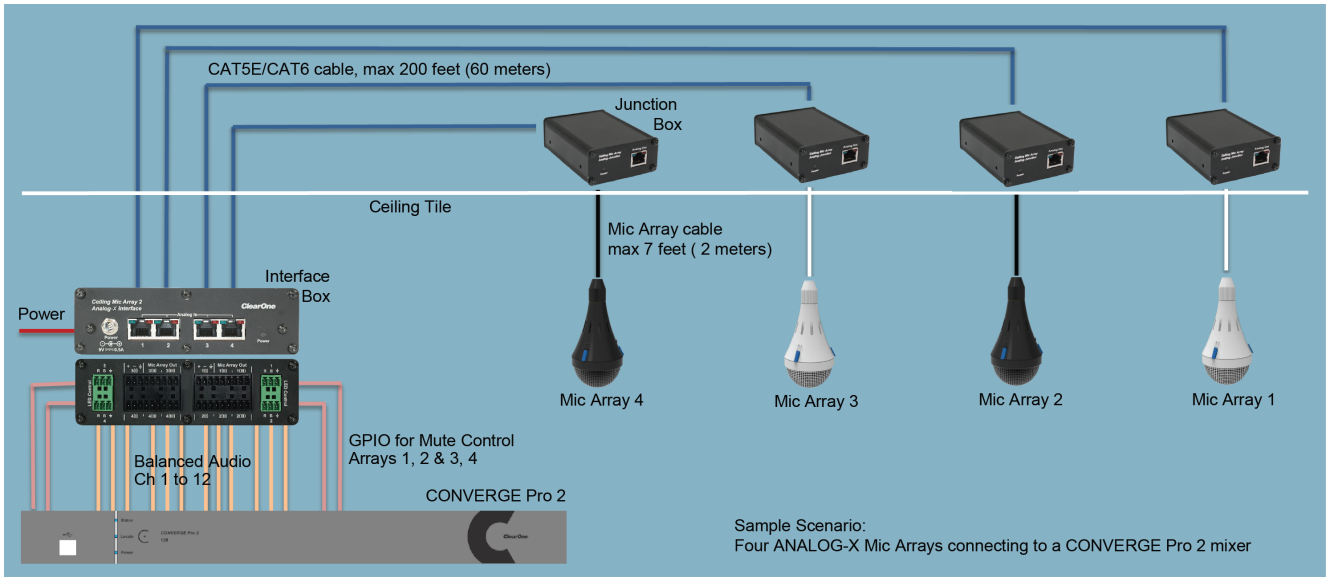

Polar Pattern

0deg normalized at each Hz

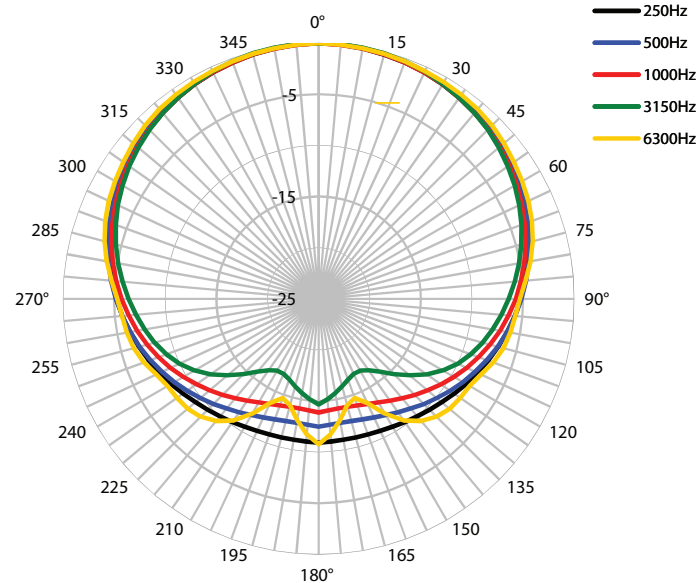

PRODUCT SPECIFICATIONS

ACOUSTIC CHARACTERISTICS

Element: Condenser (Electret)
Polar Pattern: 3 X 120° Cardioid Patterns, covering 360°
Signal/Noise Ratio: 74 dBA @ 1 kHz
Frequency Response: 70 Hz – 20 kHz
Sensitivity: -37dB @ 1 kHz (0 dB = 1V / Pa)
Max Sound Pressure Level: 120 dB SPL
RF Immunity: 100% immunity, fully balanced twisted pair throughout

POWER & THERMAL

DC Power: 9Vdc @ 0.5A
Impedance: 200 Ω
Operating Temperature: 41° to 104° F (5° to 40° C)

CABLES

Junction Box to Interface Box: RJ45 CAT5e/CAT6 24AWG (max 200 ft)
Junction Box to Mic Capsule: Proprietary Mic Array cable (max 7 ft)

LED

Component	Indicator
Mic Capsule	Mute (Red/Blue = GPIO Controlled)
Analog-X Interface	Power (On=Blue, Off=Not Illuminated) Analog-In RJ45 Mute (Red/Blue = GPIO Controlled)
Analog-X Junction	Power (On=Blue, Off=Not Illuminated) Analog-Out RJ45 Mute (Red/Blue = GPIO Controlled)

MECHANICAL

Dimensions (W x D x H)

- Mic Capsule: 1.7" x 1.7" x 86.6" (42 mm x 42 mm x 2200 mm)
- Analog-X Interface: 6.8" x 4.1" x 1.7" (172 mm x 103 mm x 43 mm)
- Analog-X Junction: 4" x 3.7" x 1.4" (102 mm x 93 mm x 35 mm)

Weight

- Mic Capsule: 6 oz (170 g)
- Analog-X Interface: 13 oz (370 g)
- Analog-X Junction: 6.5 oz (185 g)

MIC ARRAY COLOR FINISH

White or Black

COMPLIANCE

FCC, IC, CE, RoHs, WEEE, UL2043 (plenum rated)

INDIVIDUAL SKUS

S. No.	Part Number	Product Name
1	910-6200-101-W	White Mic Capsule with 7ft drop-down cable
2	910-6200-101-B	Black Mic Capsule with 7ft drop-down cable
3	910-6200-102	CMA Analog-X Junction (1 per Mic Capsule)
4	910-6200-103	CMA Analog-X Interface (1 per 4 Junction Boxes)

BUNDLED SKUS

S. No.	Bundle Type	Bundle Part No.	Bundle Product No.	Bundle Product Name					
				Qty	Part No.	Product Name			
1	Ceiling Mic Array Analog-X White Bundles	930-6200-103-W-A	Ceiling Mic Array Analog-X (1 Array = 3 Channels, White)	1	910-6200-101-W	Mic Capsule - White			
				1	910-6200-102	Analog Junction			
				1	910-6200-103	Analog Interface			
2		Ceiling Mic Array Analog-X White Bundles	930-6200-206-W-A	Ceiling Mic Array Analog-X (2 Arrays = 6 Channels, White)	2	910-6200-101-W	Mic Capsule - White		
					2	910-6200-102	Analog Junction		
					1	910-6200-103	Analog Interface		
3			Ceiling Mic Array Analog-X White Bundles	930-6200-309-W-A	Ceiling Mic Array Analog-X (3 Arrays = 9 Channels, White)	3	910-6200-101-W	Mic Capsule - White	
						3	910-6200-102	Analog Junction	
						1	910-6200-103	Analog Interface	
4				Ceiling Mic Array Analog-X White Bundles	930-6200-412-W-A	Ceiling Mic Array Analog-X (4 Arrays = 12 Channels, White)	4	910-6200-101-W	Mic Capsule - White
							4	910-6200-102	Analog Junction
							1	910-6200-103	Analog Interface
5	Ceiling Mic Array Analog-X Black Bundles				930-6200-103-B-A	Ceiling Mic Array Analog-X (1 Array = 3 Channels, Black)	1	910-6200-101-B	Mic Capsule - Black
							1	910-6200-102	Analog Junction
							1	910-6200-103	Analog Interface
6		Ceiling Mic Array Analog-X Black Bundles			930-6200-206-B-A	Ceiling Mic Array Analog-X (2 Arrays = 6 Channels, Black)	2	910-6200-101-B	Mic Capsule - Black
							2	910-6200-102	Analog Junction
							1	910-6200-103	Analog Interface
7			Ceiling Mic Array Analog-X Black Bundles		930-6200-309-B-A	Ceiling Mic Array Analog-X (3 Arrays = 9 Channels, Black)	3	910-6200-101-B	Mic Capsule - Black
							3	910-6200-102	Analog Junction
							1	910-6200-103	Analog Interface
8				Ceiling Mic Array Analog-X Black Bundles	930-6200-412-B-A	Ceiling Mic Array Analog-X (4 Arrays = 12 Channels, Black)	4	910-6200-101-B	Mic Capsule - Black
							4	910-6200-102	Analog Junction
							1	910-6200-103	Analog Interface

SALES AND INQUIRIES

Headquarters

5225 Wiley Post Way
 Suite 500
 Salt Lake City, UT 84116

US & Canada

Tel: 801.975.7200
 TollFree: 800.945.7730
 Fax: 801.303.5711

International

Tel: +1.801.975.7200
 global@clearone.com

Sales

Tel: 801.975.7200
 sales@clearone.com

TechSupport

Tel: 801.974.3760
 TollFree: 800.283.5936
 tech.support@clearone.com